

# FIRE WALLING


AGS's fire resistant boards are specially developed to offer superior fire resistance performance when used as cladding on drywall partitions.

We have expanded the Jumbo range to include a Fire rated solution; Our FireWALL 63/120/S56 has successfully passed the two hour fire test. The two hour test is particularly aggressive and requires the wall to withstand fire-side temperatures in excess of 1000OC.

The FireWALL comprising of two 15mm Fire Resistant boards on either side of a 63mm Stud successfully passed the required two hour test without any insulation being used in the cavity.

## Features and Benefits

- Lightweight construction
- Easy, fast and dry application
- 2 Hour fire rating achieved
- Excellent sound insulation performance - 56 Rw DB
- FR board contains glass fibre additives to maintain the integrity of the board for longer time periods when exposed to fire
- Environmentally friendly
- Limitless design options

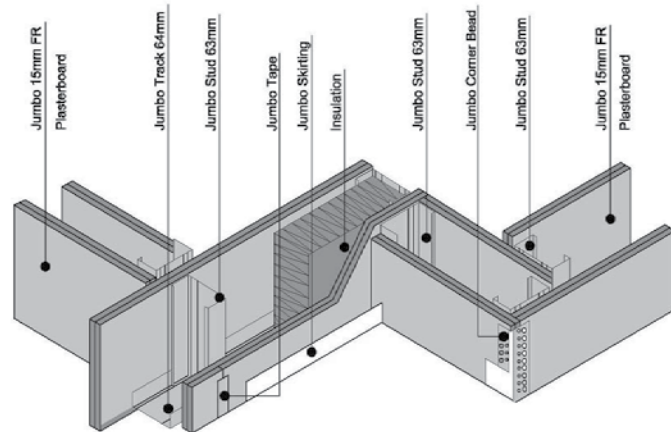

### IDEAL FOR USE IN

Healthcare, Education, Commercial, Residential & Hospitality

