

DOORS | Palace Sliding Door

Our top of the range, high performance Palace Sliding Doors are the perfect choice for residential and commercial use where wide open spaces are needed.

The Palace Door allows for large door openings up to 3 meters in height. This results in a borderless panoramic view from the inside to the outside of your environment.

The Palace Sliding Door has been designed to withstand severe winds and weather conditions, suitable for those living on the coast.

Features

- Smooth and effortless sliding action
- Easy to manufacture and install
- Corrosion resistant
- Can accommodate the Crealco Horizon shutters, assisting in controlling natural light from the inside

Glazing

- The Palace high performance sliding door is suitable for both single and double glazing options

Gaskets & Seals

- Good quality and affordable gaskets and seals, locally available.




Finish

- Available in a variety of popular architectural colours and finishes

Hardware


- Reinforced interlockers for improved windload performance
- Durable and secure locking mechanisms available

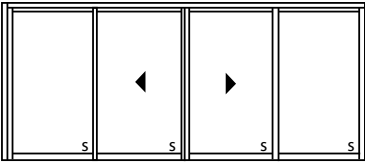

		Standard			
Width	2100(h)	2100(h)	2100(h)	2100(h)	
	Safety Glass	AAAMSA RATED PRODUCT Low-E	AAAMSA RATED PRODUCT 6.38mm SolarVue HL Low-E	AAAMSA RATED PRODUCT Sealed Insulated Safety Glass with Low-E on one side	
	1500	R 10 149	R 15 794	R 16 414	R 21 005
	1800	R 11 269	R 17 670	R 18 399	R 24 294
	2000	R 12 535	R 18 836	R 19 746	R 26 329
	2100	R 12 900	R 19 409	R 20 384	R 27 380
	2400	R 13 876	R 21 150	R 22 319	R 30 467
	2700	R 14 821	R 22 857	R 24 211	R 33 465
	3000	R 15 808	R 24 596	R 26 144	R 36 552
		3000	R 20 695	R 32 245	R 33 536
3600		R 22 786	R 34 280	R 35 651	R 47 280
4200		R 24 880	R 41 687	R 43 355	R 53 606
4800		R 26 869	R 42 839	R 44 552	R 59 835
5400		R 28 858	R 43 990	R 45 749	R 66 069
6000		R 30 850	R 45 143	R 46 948	R 72 298
		R 18 489	R 28 787	R 30 031	R 39 440
		3000	R 21 036	R 32 539	R 34 161
	3600	R 22 381	R 34 870	R 36 751	R 50 091
	4200	R 23 085	R 36 021	R 38 028	R 52 194
	4800	R 25 039	R 39 503	R 41 897	R 58 368
	5400	R 26 954	R 42 914	R 45 679	R 64 366
	6000	R 28 907	R 46 396	R 49 550	R 70 539

Both width and height of the unit is 10mm smaller than sizes shown

SIDELIGHTS (Also compatible with the ORI-FOLD® Sliding Folding Doors.)

		Width	2100(h)	2100(h)	2100(h)	2100(h)
	Unit height 10mm smaller than sizes shown Width actual size shown	600 for 2/4 Panel Door	R 5 710	R 7 188	R 7 483	R 9 675
		900 for 2/4 Panel Door	R 6 354	R 8 852	R 9 205	R 12 495
		600 for 3/6 Panel Door	R 6 058	R 7 498	R 7 798	R 9 990
		900 for 3/6 Panel Door	R 6 708	R 9 162	R 9 529	R 12 818

Sliding Window

Energy Efficient Palace Sliding Door

Can accommodate Laminated Safety Glass, Toughened Safety Glass and Double Glazing Options. SIG double glazed units are TSG clear combinations.


STANDARD FINISH AND SPECIAL COLOURS

- Standard Finishes in all regions are Bronze Powder Coated, White Powder Coated and Natural Anodised
- Special Colours Type 1 add 5% on standard price
- Special Colours Type 2 add 10% on standard price
- A list of Type 1 and Type 2 special colours are available on request

		Standard				
Width	2400(h)	2400(h)	2400(h)	2400(h)		
	Safety Glass	AAAMSA RATED PRODUCT Low-E	AAAMSA RATED PRODUCT 6,38mm SolarVue HL Low-E	AAAMSA RATED PRODUCT Sealed Insulated Safety Glass with Low-E on one side		
	1500	R 12 177	R 16 927	R 17 604	R 21 581	
	1800	R 13 523	R 19 094	R 19 858	R 24 870	
	2000	R 15 043	R 20 409	R 21 226	R 26 904	
	2100	R 15 479	R 21 082	R 21 924	R 27 957	
	2400	R 16 651	R 23 068	R 23 992	R 31 043	
	2700	R 17 786	R 25 011	R 26 011	R 34 042	
	3000	R 18 969	R 26 999	R 28 079	R 37 128	
		3000	R 22 405	R 36 525	R 37 986	R 44 111
		3600	R 25 681	R 40 294	R 41 906	R 51 067
		4200	R 26 908	R 45 018	R 46 818	R 58 022
4800		R 27 847	R 48 785	R 50 737	R 64 884	
5400		R 29 465	R 54 092	R 56 256	R 71 748	
6000		R 34 342	R 58 937	R 61 295	R 78 610	
3000		R 22 184	R 31 125	R 32 371	R 40 471	
		3000	R 25 244	R 35 461	R 36 879	R 47 051
		3600	R 26 856	R 38 093	R 39 617	R 51 121
		4200	R 27 702	R 39 439	R 41 017	R 53 226
	4800	R 30 046	R 43 416	R 45 154	R 59 402	
	5400	R 32 343	R 47 297	R 49 189	R 65 397	
	6000	R 34 687	R 51 275	R 53 327	R 71 571	

Both width and height of the unit is 10mm smaller than sizes shown

SIDLIGHTS (Also compatible with the ORI-FOLD® Sliding Folding Doors.)

		Width	2400(h)	2400(h)	2400(h)	2400(h)
			Safety Glass	AAAMSA RATED PRODUCT Low-E	AAAMSA RATED PRODUCT 6,38mm SolarVue HL Low-E	AAAMSA RATED PRODUCT Sealed Insulated Safety Glass with Low-E on one side
Unit height 10mm smaller than sizes shown Width actual size shown 	600 for 2/4 Panel Door		R 6 527	R 8 221	R 550	R 11 056
	900 for 2/4 Panel Door		R 7 230	R 10 087	R 10 491	R 14 249
	600 for 3/6 Panel Door		R 6 865	R 8 507	R 8 858	R 11 364
	900 for 3/6 Panel Door		R 7 865	R 10 646	R 11 072	R 14 831

Sliding Window

Energy Efficient Palace Sliding Door

Can accommodate Laminated Safety Glass, Toughened Safety Glass and Double Glazing Options. SIG double glazed units are TSG clear combinations.

STANDARD FINISH AND SPECIAL COLOURS

- Standard Finishes in all regions are Bronze Powder Coated, White Powder Coated and Natural Anodised
- Special Colours Type 1 add 5% on standard price
- Special Colours Type 2 add 10% on standard price
- A list of Type 1 and Type 2 special colours are available on request